



A: 289 B: 223 C: 191 D: 191 E: 239

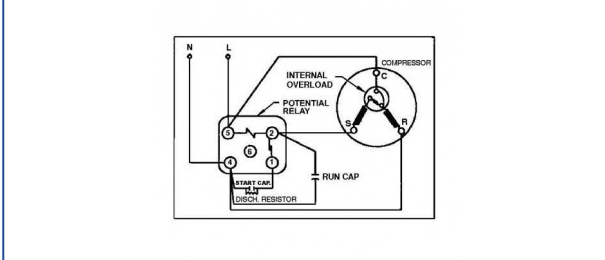

High Torque Start

SCHMATIC WIRING DIAGRAM -
-

MOUNTING KIT
-

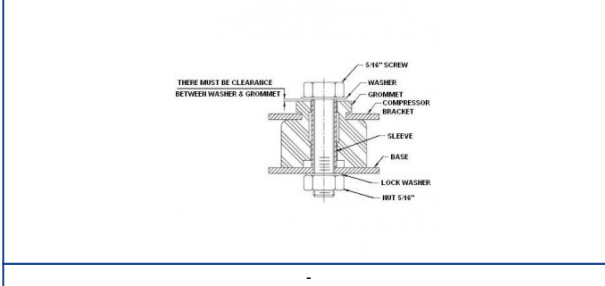

Electrical : 220-240 V/ 50 Hz., - V/ - Hz. 1 Phase -/- HP

Nominal Performance	
Capacity	1,580 / - Watts 5,391 / - BTU/Hr 1,359 / - Kcal/Hr
Power Input	1,280 / - Watts
Locked Rotor Amps	43.00 / - Amps
Max Continuous Current	- / - Amps
Rated Load Amps	6.90 / - Amps
COP	1.23 / - Watts / Watts
EER	4.21 / - BTU/W-Hr

Testing Conditions	
Condensing Temperature	54.40 °C 129.92 °F
Evaporating Temperature	-23.30 / - °C -9.94 / - °F
Liquid Temperature	32.20 °C 89.96 °F
Return Gas Temperature	32.20 °C 89.96 °F
Ambient Temperature	32.20 °C 89.96 °F

Application	
Evaporating Temp. Range	LBP @ -34.40 °C to -12.20 °C (-29.92 F to 10.04 °F)
	Heat Pump - °C to - °C (- °F to - °F)
Refrigerant	R404A
Refrigerant Flow Control	Capillary Tube
Compressor Cooling	Fan

Compressor and Motor data	
Compressor Type	Reciprocating
Displacement	43.1 cc.
Oil Type	Polyolester Oil
Oil Charge	1067 cc.
Motor Type	C.S.R. ;2 Pole 2850 / - r/m
Voltage Range	198-264/- Volts 50/- Hz.
Winding Resistance at 25 ° C	
Start	4.38 Ohms
Run	1.52 Ohms
Weight with Oil	24.77 Kg.
Weight with Oil and Accessories	25.57 Kg.

Electrical Components	
Motor Protector	
Type	Internal Overload
Model Number	4042KGE656-8
Open / Close	130-140 / 78-60 ° C
1st Cycle trip at 25 ° C	51.00 Amps(main) 29.00 Amps(start)
Motor Starter	
Type	Potential Relay
Model Number	4043KGE681-3 (RVA3H6D)
Pick Up (max.)	190.00-215.00 Volts
Drop Out (min.)	40.00-105.00 Volts
Terminal Cover	4040KGM901-3
Start Capacitor	130-156 µF 330 VAC.
Disch Resistor for Start Cap	15000 Ohms 2 w
Run Capacitor	30 µF 440 VAC.

Mounting Kit	
Rubber Grommet	4007KGM905-2
Sleeve Grommet	4023KGM903-2
Washer	-

Since we are constantly improving our product , the specification are subject to change without notice.

REV. DATE 13-10-2017 C / N No. 0394/17

Certificate Marks

